

Tumble dryer

TD6-20 with heat pump



Dryer featuring exceptional savings and effortless use



Priority on people

Certified ergonomic design with a human-centered approach for an outstanding user experience

- Lint filter

The horizontal filter drawer is positioned for easy access and cleaning without the need to bend down



Long-term savings

Innovative features to save money and time, and embrace a sustainable lifestyle with up to 62,5% energy saving due to the heat pump technology

- Moisture Balance
Helps to stop the drying process at the right time to save on energy costs



Pure control

Monitor your equipment and performance from anywhere, allowing to take action and to improve your business with OnE Laundry - the personal assistant for hygiene validation management, process management and revenue management (optional)



Outstanding productivity

Dry more laundry in less time: a game-changing improvement

- Reversing drum
Minimizes wrinkles and drying time to get an effective and even drying performance

Main options and accessories

- Insulated glass door keeps the door cool on the outside and heat on the inside, so the room temperature is not affected
- Lagoon Advanced Care
- Drum Speed Control adjusts the movement of the drum to help garments move correctly for a faster drying process
- Door, front and side panels are available in stainless steel
- Connectable to booking-/payment system or coin meter



Images shown are a representation of the product only and variations may occur.
To get the door design you need to add the insulated glass.

Main specifications			TD6-20
Rated capacity, filling factor 1:18	kg/lb		20.0/44.1
filling factor 1:22	kg/lb		16.4/36.2
Drum volume	litre		360
Drum diameter	mm		755
Rated input	kW		6.5
Consumption data*			
Total time full load	min		44
Energy consumption full load	kWh		2.99
Evaporation	g/min		185
Energy kWh/litre water evaporated	kWh/l		0.36

* At rated capacity 1:22, 100% cotton load at 50% initial moisture dried to 0%.

Produced according to ISO 9001 and ISO 14001.

Certified with CB certificate for Low Voltage Directive and S-mark according to the Machinery Directive. Protection class IP X4D.

Electrical connections				
Heating alternative	Main voltage Hz	Heating power kW	Total power kW	Recommended fuse A
Heat pump	220-240V 1/1N ~ 50/60 380-415V 3/3N ~ 50/60	* *	5.5 6.5	25 10


* Total power and recommended fuse does not depend on the heating power in those cases.

Sound levels		TD6-20
Sound power/pressure level at drying*	dB(A)	72/56
Heat emission		
% of installed power, max		15
Shipping data**		
Weight	kg	308
Shipping volume	crated, m ³	2.15
Dimensions in mm		
A Width		790
B(a) Depth		1200
B(b) Depth		1230
C Height		1770
D		775
E		835
F		750
G		110
H		270
I		125
J		260
1	Operating panel	
2	Door opening ø 580 mm	
3	Electrical connection	
4	Drain for condense water	


Front and side panels in silver grey and dark blue (color samples can be ordered on part number 472998313).

* Sound power levels measured according to ISO 60704.


** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

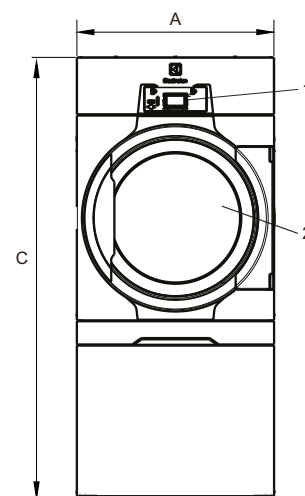

Front

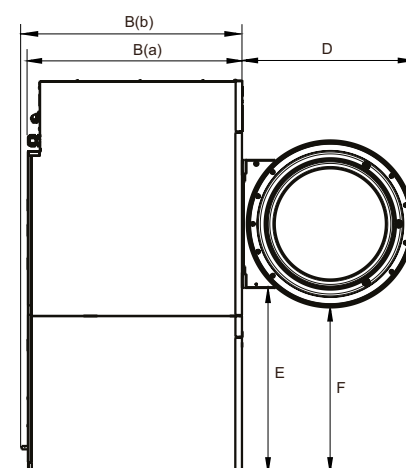

Left side

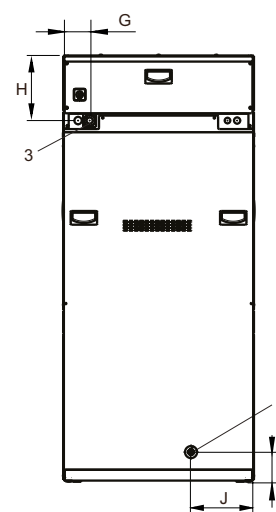

Rear side