



Range Overview

Professional Laundry

Excellent solutions that meet your needs

Boasting intelligent features and unique benefits, our solutions offer the utmost in quality combined with the lowest utility costs for laundries of all sizes.



Electrolux Professional Excellence

Excellence is central to everything we do.

By anticipating our customers' needs, we strive for Excellence with our people, innovations, solutions and services.

To be the OnE making our customers' work-life easier, more profitable – and truly sustainable every day.



Our design is all about you

Anyone who does laundry day in and day out knows that repetitive acts like reaching, bending and pouring can be stress points that make the job more difficult and reduce productivity. By focusing on the physical and cognitive interaction between user and equipment, **we make each of these motions more comfortable for an all-around effortless experience.**

Certified comfort

The user interface has passed third party external testing and the new range is **certified to international standards of ergonomics** and human-centered design.

Our washers, dryers, barrier washers and ironers have earned **the prestigious 4-star rating for ergonomics.**

This means they have been user-tested to make sure your operators will feel less tension and strain, so they—and your business—can thrive.

Pioneers in usability

Ergonomic interventions can reduce work-related musculoskeletal disorders (WMSDs) by **59%**, with an average decrease of **75%** in sick days and a **25%** increase in productivity.

Washington State
Department of Labor & Industries

UNIQUE
in the industry



Experience 4-stars



Compliance with ergonomic principles
Designed with you in mind



Evidence-based anthropometric & biomechanical compliance
Reduced risk of injury



Evidence-based usability
The culmination of years of professional studies and expertise



Human-centered design
To make laundry simple and stress-free

Washer Extractor Control

Ensures the best utility cost optimisation and customising



ClarusVibe

- ▶ A clear and comprehensive layout of the full HD 7" color touchscreen gives users full command of the process
- ▶ An easy-to-use interface allows to set a customizable picture for each selected program
- ▶ Fully and easily editable programs for any washing need. From delicate garments to workwear and from surgical scrubs to plastic toys
- ▶ 15 liquid detergent signals
- ▶ The library can be updated any time, directly on screen, without the need for a computer
- ▶ Compatible with any language, left-to-right and right-to-left scripts
- ▶ On-screen statistics (working time, runs, waiting time, load weight, ...)
- ▶ Full control of dosing pumps, the right amount of each chemical is added at the right step of the process



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in up to 18 languages, plus Real-time clock
- ▶ Create new programs your PC with the Laundry Program Manager, then transfer them to machines via USB port
- ▶ 5 liquid detergent signals
- ▶ Process monitoring via Certus Management™ Information System



Clarus Control®

- ▶ Fully programmable with up to 194 programs for unparalleled versatility
- ▶ Create new programs directly on the Clarus Control®/ Clarus Control® TS panel or on your PC with the Laundry Program Manager, then transfer them to machines via memory card
- ▶ Intelligent parameters save time, energy and water while delivering excellent wash and rinse results in every application
- ▶ 8 liquid detergent signals
- ▶ Process monitoring via Certus Management™ Information System*



Clarus Control® TS

- ▶ Easy-to-use touch screen for Pullman barrier washers
- ▶ Fully programmable with up to 30 programs
- ▶ Delayed start with Real-time clock for next-day unloading
- ▶ 13 liquid detergent signals
- ▶ Second display option on the clean side for more cycle oversight
- ▶ Create new programs directly on the Clarus Control® TS panel or on your PC with the Laundry Program Manager, then transfer them to machines via memory card

Tumble Dryer Control

Ensures the best flexibility and usability



Compass Pro®

- Flexible and customisable
- Up to 55 programs available of which 15 programmable
- Large, clear display in up to 18 languages, plus Real-time clock
- Heat Pump log available for Heat Pump version
- Larger font and clearer program icons




Selecta Control®

- Select drying time, cooling and reverse action
- Continuous self-testing, displays and logs error codes for easy troubleshooting
- Process monitoring via Certus Management™ Information System

Ironer Control

ensures the best results thanks to process optimisation

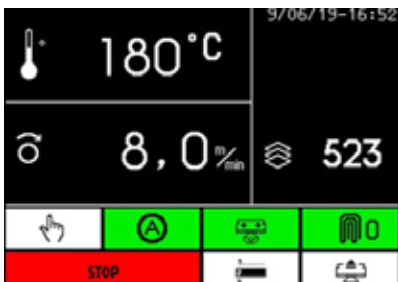

Clarus TS (only for the FFS model)

- Touch screen interface
- Perfect to manage an ironer equipped with a Feeder, a Length folder, a Cross folder and a Stacker (The Folding can be made automatically or defined via customizable programs)
- Helpful to minimize the training requirements
- The ironer can be used in Manual mode or Automatic mode (DIAMMS functionality)
- Provides numerous technical pages for accessing statistics/ customization and support maintenance and service



Digital interface

- Unique 3 buttons digital display with 2 lanes information
- Speed, temperature and item counter are immediately available in the screen
- The navigation is intuitive and userfriendly (Full Menu-Guided setup)
- This interface do have a service mode to support easy maintenance and service



Electro-mechanical control

- Easy to read and set
- Ironing temperature and speed can be adjusted at any time
- Autostop function to maximise ironing belt lifetime (standard)

Excellence for your Professional Laundry

Because every laundry is different



Self-Service Laundry

Robust and easy-to-use machines, easy maintenance and fast access for customers. That's the key to a successful self-service laundry. Our solutions are developed for low running costs, reduce downtime and maximise efficiency in the total process.



Multi-Housing Laundry

Best-in-class solutions for quality, economy and excellent washing results. Flexible programs and easy-to-use instructions give your tenants a pleasant laundry experience. Thanks to lower water and energy consumption, both you and the environment win.



Commercial Laundry

Higher performance, higher productivity, lower running costs and maximum transparency in the laundry process: that's what really matters in the commercial B2B laundry business. The lagoon® Advanced Care system from Electrolux Professional is a complete business opportunity to keep your commercial B2C laundry operating at its maximum level while reducing environmental liability costs. An eco-friendly solution for the care of delicate garments, approved by The Woolmark Company.



Care Laundry

Always maximum hygiene standards and full control over the laundry process. Thanks to best-in-class hygiene programs, Electrolux Professional offers safe and reliable solutions combined with unparalleled flexibility.



Facility Management Laundry

A clean performance for your material assets. Short processes, increased efficiency, long mop service life and optimal cleaning quality. In a nutshell: microfibre Excellence by Electrolux Professional.



Hospitality Laundry

Improve your service with 5-stars solutions for cost savings and reliability. Boasting intelligent features and unique extras, our excellent solutions offer the utmost in quality combined with the lowest utility costs for in-house laundries of all sizes. For total control of your laundry costs.



In-House Laundry

Optimise your internal resources with Electrolux Professional in-house solutions. Flexible programs give you full control over your laundry for superior results and the lowest cost per wash.



Marine Laundry

Durable Electrolux Professional laundry solutions are perfect for life at sea. Offering savings in time and running costs, they are flexible and easy to use, with a reduced impact on the environment. lagoon® Advanced Care , just one of our solutions, is the perfect alternative to dry-cleaning: gentle on all fabrics using no chemical solvents only biodegradable detergents.

Washer Extractors

Line 6000

Line 6000

ClarusVibe
Washer Extractors
Soft Mount
H Spin Range



	WH6-7CV	WH6-8CV	WH6-11CV	WH6-14CV	WH6-20CV	WH6-27CV	WH6-33CV
Drum volume (l)	65	75	105	130	180	240	300
Dry weight capacity (kg/lb)	7/15	8/18	11/25	14/30	20/45	27/60	33/75
G-factor	450	450	450	450	450	450	450
Width (mm-in)	720 - 28 3/8"	720 - 28 3/8"	830 - 32 11/16"	910 - 35 13/16"	970 - 38 3/16"	1020 - 40 3/16"	1020 - 40 3/16"
Depth (mm-in)	720 - 28 3/8"	720 - 28 3/8"	757 - 29 13/16"	820 - 32 1/4"	945 - 37 3/16"	990 - 39"	1135 - 44 11/16"
Height (mm-in)	1130 - 44 1/2"	1130 - 44 1/2"	1210 - 47 5/8"	1325 - 52 3/16"	1410 - 55 1/2"	1460 - 57 1/2"	1445 - 56 7/8"
Electric/Steam/ Non-heated	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓
Dual Heating alternative	x	x	x	o	o	o	o
Number of detergent pumps	15	15	15	15	15	15	15
Front loaded detergent box	x	x	x	o	o	o	o
Top loaded detergent box	o	o	o	o	o	o	o
Automatic Savings	•	•	•	•	•	•	•
Intelligent Dosing	•	•	•	•	•	•	•
Power Balance	•	•	•	•	•	•	•
Integrated Savings	o	o	o	o	o	o	o
Ergonomics rating	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★	★★★★★



Washer Extractors

Line 6000

Line 6000

Compass Pro
Washer Extractors
Soft Mount
H Spin Range



	WH6-6	WH6-7	WH6-8	WH6-11	WH6-14	WH6-20	WH6-27	WH6-33
Drum volume (l)	53	65	75	105	130	180	240	300
Dry weight capacity (kg/lb)	6 / 13	7 / 15	8 / 18	11 / 25	14 / 30	20 / 45	27 / 60	33 / 75
G-factor	530	450	450	450	450	450	450	450
Width (mm-in)	595 - 23 7/16"	720 - 28 3/8"	720 - 28 3/8"	830 - 32 11/16"	910 - 35 13/16"	970 - 38 5/16"	1020 - 40 3/16"	1020 - 40 3/16"
Depth (mm-in)	680 - 26 3/4"	720 - 28 3/8"	720 - 28 3/8"	770 - 30 3/16"	820 - 32 1/4"	945 - 37 3/16"	990 - 39"	1135 - 44 11/16"
Height (mm-in)	830 - 32 11/16"	1135 - 44 11/16"	1135 - 44 11/16"	1215 - 47 13/16"	1345 - 52 15/16"	1430 - 56 5/16"	1465 - 57 1/2"	1465 - 57 1/2"
Electric / Steam / Non-heated	✓ / X / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Number of detergent pumps	12	12	12	12	12	12	12	12
Top loaded detergent box	X	•	•	•	•	•	•	•
Automatic Savings	•	•	•	•	•	•	•	•
Efficient Dosing	o	o	o	o	o	o	o	o
Power Balance	•	•	•	•	•	•	•	•
Ergonomics rating	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★

Front and side panel in stainless steel as option.

● standard ○ optional ✓ available X not available ★ ergonomics certified



Line 6000 range is powered by the Global Hygiene Advanced program package

RISE

to assure 99,9999% reduction of SARS-CoV-2 virus through the combination of washing and drying, or washing and ironing cycles. **Deliver clean and disinfected linen** in every laundry installation.

The efficacy is endorsed by RISE (The Research Institute of Sweden) on the basis of Electrolux Professional laboratory data

Washer Extractors

Line 6000

Line 6000

Compass Pro
Washer Extractors
Rigid Mount
N/S Spin Range



	WN6-8/ WS6-8	WN6-9/ WS6-9	WN6-11/ WS6-11	WN6-14/ WS6-14	WN6-20/ WS6-20	WN6-28/ WS6-28	WN6-35/ WS6-35
Drum volume (l)	75	85	105	130	180	250	330
Dry weight capacity (kg/lb)	8/18	9/20	11/25	14/30	20/45	28/62	35/75
G-factor (N/S)	130/200	130/200	130/200	130/200	130/200	130/200	130/200
Width (mm-in)	660 - 26"	660 - 26"	720 - 28 3/8"	720 - 28 3/8"	750 - 29 1/2"	830 - 32 11/16"	910 - 35 13/16"
Depth (mm-in)	680 - 26 3/4"	725 - 28 9/16"	700 - 27 9/16"	790 - 31 1/8"	915 - 36"	1030 - 40 9/16"	1115 - 43 7/8"
Height (mm-in)	1135 - 44 11/16"	1135 - 44 11/16"	1220 - 47 15/16"	1220 - 47 7/8"	1345 - 52 15/16"	1430 - 56 1/8"	1465 - 57 11/16"
Electric/Steam/ Non-heated	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓
Number of detergent pumps	12	12	12	12	12	12	12
Top loaded detergent box	●	●	●	●	●	●	●
Automatic Savings	NX/S●	NX/S●	NX/S●	NX/S●	NX/S●	NX/S●	NX/S●
Efficient Dosing	○	○	○	○	○	○	○
Power Balance	NX/SX	NX/SX	NX/SX	NX/SX	NX/S●	NX/S●	NX/S●
Super Balance	N●/S●	N●/S●	N●/S●	N●/S●	N●/SX	N●/SX	N●/SX
Ergonomics rating	★★★	★★★	★★★	★★★	★★★	★★★	★★★

Front and side panel in stainless steel as option.

● standard ○ optional ✓ available ✕ not available ★ ergonomics certified N/S Normal or Super Spin

Generation 4000

Generation 4000

Washer Extractors
Soft Mount
H High Spin Range



	W4400H	W4600H	W4850H	W41100H
Drum volume (l)	400	600	850	1100
Dry weight capacity (kg/lb)	45/100	65/145	90/200	120/250
G-factor	350	350	350	300
Width (mm-in)	1325 - 52 3/16"	1390 - 54 13/16"	1640 - 64 9/16"	1640 - 64 9/16"
Depth (mm-in)	1450 - 57 1/16"	1585 - 62 1/2"	1635 - 64 3/8"	1850 - 72 13/16"
Height (mm-in)	1975 - 77 3/4"	1975 - 77 3/4"	2190 - 86 1/4"	2190 - 86 1/4"
Electric/Steam/Non- heated	✓/✓/✓	✓/✓/✓	✕/✓/✓	✕/✓/✓
Dual Heating alternative	○	○	○	○
Clarus Control®	●	●	●	●
Tilting	○	○	○	○
IWS (Integrated Weighing System)	○	○	○	○

Soft Mount machines

Direct installation on
all types of floors

Rigid Mount machines

Need to be fixed to
the floor

G factor

N Normal Spin 130 G
S Super Spin 200 G
X Extra Spin 220 - 300 G
H High Spin 450 - 530 G

● standard ○ optional
✓ available ✕ not available

Front and side panels in stainless steel as option. More information on product data sheets

Barrier Washers

Line 6000

Line 6000 Evolution Barrier Washers



	WB6-20	WB6-27	WB6-35
Drum volume (l)	200	270	350
Dry weight capacity (kg/lb)	20 / 44	27 / 60	35 / 77
G-factor	350	350	350
Width (mm-in)	915 - 36"	1050 - 41 5/16"	1270 - 50"
Depth (mm-in)	1030 - 40 9/16"	1030 - 40 9/16"	1030 - 40 9/16"
Height (mm-in)	1620 - 63 3/4"	1620 - 63 3/4"	1620 - 63 3/4"
Non-heated / Electric / Direct steam / Indirect Steam / Low pressure steam / Electric & steam / Gas	✓/✓/✓/✓/✓/✓/✓	✓/✓/✓/✓/✓/✓/✓	✓/✓/✓/✓/✓/✓/✓
Number of detergent signals	13	13	13
Detergent box	○	○	○
CompassPro	●	●	●
Double Compass Pro	○	○	○
Integrated Weighing System	○	○	○
Power balance	●	●	●
Automatic Inner Door Opening (AIDO)	○	○	○
Clean room construction	○	○	○
Ergonomics rating	★★★★	★★★★	★★★★

● standard ○ optional ✓ available ✕ not available ★ ergonomics certified



Barrier Washers

Line 5000 and Generation 4000

Line 5000 & Generation 4000



Side load Barrier Washers	WB5130H	WB5180H	WHB5500H	WPB4700H	WPB4900H	WPB41100H
Drum volume, l	130	180	500	690	890	1080
Dry weight capacity, kg/lb	13/30	18/40	50/110	70/154	90/198	110/242
G-factor	300	300	350	300	300	300
Width (mm - in)	910 - 35 13/16"	970 - 38 3/16"	1300 - 51 3/16"	1496 - 58 7/8"	1726 - 67 15/16"	1956 - 77"
Depth (mm - in)	875 - 34 7/16"	975 - 38 3/8"	1265 - 49 13/16"	1363 - 53 11/16"	1363 - 53 11/16"	1363 - 53 11/16"
Height (mm - in)	1325 - 52 3/16"	1410 - 55 1/2"	1770 - 69 11/16"	2040 - 80 5/16"	2040 - 80 5/16"	2040 - 80 5/16"
Non-heated / Electric / Direct steam / Indirect Steam / Low pressure steam / Electric & steam / Gas	✓ / ✓ / ✓ / X X / ✓ / X	✓ / ✓ / ✓ / X X / ✓ / X	✓ / ✓ / ✓ / ✓ ✓ / ✓ / ✓	✓ / ✓ / ✓ / ✓ ✓ / ✓ / X	✓ / ✓ / ✓ / ✓ ✓ / ✓ / X	✓ / ✓ / ✓ / ✓ ✓ / ✓ / X
Compass Pro®	●	●	●	X	X	X
Clarus TS®	X	X	X	●	●	●
Clean room construction	X	X	○	○	○	○
Ergonomics rating	X	X	★★★★	★★★	★★★	★★★

Front and side panels in stainless steel as option. More information on product data sheets
Consult your Electrolux Professional contact regarding special constructions for Barrier Washers

● standard ○ optional ✓ available X not available



Tumble Dryers

Line 6000



	TD6-6	TD6-7	TD6-10	TD6-10 HP	TD6-14	TD6-16
Drum volume (l)	130	135	190	190	255	290
Dry weight capacity (kg/lb)*	6/13	7/15	10.6 / 23	10.6 / 23	14/30	16.1 / 35.5
Width (mm-in)	597 - 23 1/2"	600 - 23 5/8"	720 - 28 3/8"	720 - 28 3/8"	790 - 31 1/8"	715 - 28 1/8"
Depth (mm-in)	725 - 28 9/16"	845 - 33 1/4" (el) 875 - 34 7/16" (gas)	765 - 30 1/8" (el) 805 - 31 1/16" (gas)	775 - 30 1/2"	965 - 38" (el/gas/HP) 1105 - 43 1/2" (steam)	1210 - 47 5/8"
Height (mm-in)	839 - 33"	1050 - 41 5/16"	1115 - 43 7/8"	1685 - 66 5/16"	1770 - 69 11/16"	1690 - 66 9/16"
Electric/Gas/Heat Pump/Steam	✓/X/X/X	✓/✓/✓/✓	✓/✓/✓/✓	X/X/✓/✓	✓/✓/✓/✓	✓/✓/✓/✓
Horizontal filter	X	●	●	●	●	●
Drum Speed control	X	X	X	X	○	X
Adaptive Fan control	X	X	X	X	○	X
Moisture Balance	X	○	○	○	○	○
Stainless steel drum	●	○	○	○	○	○
Galvanized steel drum	X	●	●	●	●	●
Compass Pro	●	●	●	●	●	●
Reversing drum	X	●	●	●	●	●
Ergonomics rating	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★

● standard ○ optional ✓ available X not available ★ ergonomics certified

Wash & dry 60 kg per day in less than 0.4 m²!

The **WH6-6 Washer** and the **TD6-7 Dryer** are both full-featured professional models in a compact size. With their small footprint, they fit into challenging spaces, providing optimal results.

Stackable!

They can be stacked to save space.
In this case, the control panel on the dryer is moved to the bottom so it stays within easy reach.



Tumble Dryers

Line 6000 and Generation 4000

Line 6000



	TD6-17S	TD6-20	TD6-24S	TD6-30	TD6-37
Drum volume (l)	2x300	360	2x423	550	675
Dry weight capacity (kg/lb)*	2x16.7/2x37	20/44	2x23.5/ 2x51.7	30.5/67.2	37.5/82.7
Width (mm-in)	790 - 31 1/2"	790 - 31 1/8"	870 - 34 1/4"	960 - 37 13/16"	960 - 37 13/16"
Depth (mm-in)	1115 - 43 7/8"	1202 - 47 5/16" (el/gas/HP) 1340-52 3/4 (steam)	1335 - 52 9/16"	1365 - 53 3/4"	1560 - 61 7/16"
Height (mm-in)	1940 - 67 11/16"	1770 - 69 11/16"	2085 - 82 1/16"	1855 - 73"	1855 - 73"
Electric/Gas/Heat Pump/Steam	✓/✓/×/×	✓/✓/✓/✓	×/✓/×/×	✓/✓/×/✓	✓/✓/×/✓
Horizontal filter	●	●	●	●	●
Drum Speed control	×	○	×	×	×
Adaptive Fan control	×	○	×	×	×
Moisture Balance	○	○	×	○	○
Stainless steel drum	○	○	○	○	○
Galvanized steel drum	●	●	●	●	●
Compass Pro®	●	●	●	●	●
Reversing Drum	●	●	●	●	●
Ergonomics rating	★★★	★★★★	★★★	★★	★★

● standard ○ optional ✓ available × not available ★ ergonomics certified

Generation 4000



	T4900 T4900SLD	T41200 T41200SLD	T4900CR	T41200CR
Drum volume (l)	900	1200	900	1200
Dry weight capacity (kg/lb)	50/110	66,7/147	45/100	60/135
Width (mm-in)	1290 - 50 13/16"	1290 - 50 13/16"	1290 - 50 13/16"	1290 - 50 13/16"
Depth (mm-in)	1295 - 51"	1485 - 58 7/16"	2115 - 83 17/64"	2305 - 90 3/4"
Height (mm-in)	2465 - 97"	2465 - 97"	2690 - 105 29/32"	2690 - 105 29/32"
Electric/Gas/Steam	✓/✓/✓	✓/✓/✓	✓/×/✓	✓/×/✓
Energy (kWh/l) water evaporated* (Electric/Gas/Steam)	1.2/1.16/1.91	1.17"/1.23/1.64	1.23/×/1.87	1.38/×/1.55
Selecta Control®	●	●	mix of Compass Control (front) and Selecta (behind)	mix of Compass Control (front) and Selecta (behind)
Residual Moisture Control	○	○	×	×
Reversing Drum Action	●	●	●	●
Sliding door	○	○	×	×
Tilting	○	○	×	×

Front and side panels in stainless steel as option. More information on product data sheets T4900CR and T41200CR are specially designed for Cleanroom environment
 * At rated capacity 100 % cotton load at 50 % initial moisture dried to 0 %
 ** Test load 48 kg/100 lbs

● standard
 ○ optional
 ✓ available
 × not available

lagoon® Advanced Care Washer Extractors

					
	WH6-6LAC	WH6-14LAG	WH6-20LAC	WH6-27LAC	WH6-33LAC
Drum volume (l)	53	130	180	240	300
Dry weight capacity (kg/lb)	6 / 13	14 / 30	20 / 45	27 / 60	33 / 75
Wool capacity (kg/lb)	4 / 9	7 / 15	14 / 30	19 / 42	23 / 50
G-factor	530	450	450	450	450
Width (mm-in)	595 - 23 7/16"	910 - 35 13/16"	970 - 38 3/16"	1020 - 40 3/16"	1020 - 40 3/16"
Depth (mm-in)	680 - 26 3/4"	820 - 32 1/4"	945 - 37 3/16"	990 - 39"	1135 - 44 11/16"
Height (mm-in)	830 - 32 11/16"	1325 - 52 3/16"	1410 - 55 1/2"	1460 - 57 1/2"	1445 - 56 7/8"
Electric / Steam	✓ / X	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
ClarusVibe	X	●	●	●	●
Compass Pro®	●	X	X	X	X
ProV'tex	●	X	●	●	●
Number of detergent pumps	10	15	15	15	15
Front loaded detergent box	●	X	X	X	X
Top loaded detergent box	X	●	●	●	●
Automatic Savings	●	●	●	●	●
Intelligent Dosing	X*	●	●	●	●
Power Balance	●	●	●	●	●
Integrated Savings	X	●	●	●	●
Ergonomics rating	★★★★	★★★★	★★★★	★★★★	★★★★

● standard ○ optional ✓ available X not available ★ ergonomics certified *Efficient Dosing system available



lagoon®


WOOL CARE
PROFESSIONAL
FABRIC CARE SYSTEM

lagoon® Advanced Care Tumble Dryers



	TD6-7LAC	TD6-14LAC	TD6-20LAC	TD6-30LAC	TD6-37LAC
Drum volume (l)	135	255	360	550	675
Dry weight capacity (kg/lb)*	7 / 15	14 / 30	20 / 44	30.5 / 67.2	37.5 / 82.7
Width (mm-in)	600 - 23 5/8"	790 - 31 1/8"	790 - 31 1/8"	960 - 37 13/16"	960 - 37 13/16"
Depth (mm-in)	845 - 33 1/4" (el) 875 - 34 7/16" (gas)	965 - 38" (el/gas/HP) 1105 - 43 1/2" (steam)	1202 - 47 5/16" (el/gas/HP) 1340 - 52 3/8" (steam)	1365 - 53 3/4"	1560 - 61 7/16"
Height (mm-in)	1050 - 41 5/16"	1770 - 69 11/16"	1770 - 69 11/16"	1855 - 73"	1855 - 73"
Electric/Gas/Heat Pump/Steam	✓/✓/✓/✗	✓/✓/✓/✓	✓/✓/✓/✓	✓/✓/✗/✓	✓/✓/✗/✓
Horizontal filter	●	●	●	●	●
Drum Speed control	✗	○	○	✗	✗
Adaptive Fan control*	✗	○	○	✗	✗
Moisture Balance	●	●	●	●	●
Stainless steel drum	●	●	●	●	●
Galvanized steel drum	✗	✗	✗	✗	✗
Compass Pro®	●	●	●	●	●
Reversing Drum	●	●	●	●	●
Double glass door	●	●	●	✗	✗
Ergonomics rating	★★★★	★★★★	★★★★	★★	★★

● standard ○ optional ✓ available ✗ not available ★ ergonomics certified * On EI models only



Drying Cabinets

Line 6000



	DC6-4	DC6-4HP	DC6-8	DC6-8HP
Rated capacity (kg)	4	4	8	8
Evaporation* (g/min)	19	30	84	50
Drying time* (min)	105	67	47	60
Rated input (kW)	1,5	1,2	6,2	2,3
Energy/load of linen (kWh/kg)	0,6	0,29	0,6	0,35
Energy/water evaporated (kWh/l)	1,27	0,58	1,14	0,7
Sound power/pressure level at drying** dB(A)	57/41	<62	<70	<62
Average heat emission per drying cycle***	/	0,6	/	1,7
Net kg weight	56	95	134	189
Width (mm)	595	595	1200	1195
Depth (mm)	605	665	580	645
Height (mm)	1900	1910	1820	2060

* Applies to the rated capacity kg dry weight cotton with 50% residual moisture.
(Less kg for the HP - consult the PDS for more details)

** Sound power levels measured according to ISO 60704.

*** For assistance with dimensioning necessary ventilation needs, contact authorized ventilation technician.

**** With impregnation program 75SDgrC.



**Rely on the
comfort of dry
clothing when
setting up for
your mountains
challenge**

Drying Cabinets

Line 6000



	DC6-10HP	DC6-14	DC6-14HP	DC6-15
Rated capacity (kg)	10	10	10	15
Evaporation* (g/min)	55	95	80	57
Drying time* (min)	60	58	69	95
Rated input (kW)	2,6	9	2,6	Heater output 6
Energy/load of linen (kWh/kg)	0,31	0,82	0,22	0.66****
Energy/water evaporated (kWh/l)	0,62	1,49	0,4	1,9****
Sound power/pressure level at drying** dB(A)	<70	<70	<70	<70
Average heat emission per drying cycle***	1,1	/	1,2	/
Net kg weight	205	175	250	200
Width (mm)	1395	1805	1805	1200
Depth (mm)	650	800	800	750
Height (mm)	1915	1805	1805	1970

* Applies to the rated capacity kg dry weight cotton with 50% residual moisture.
(Less kg for the HP - consult the PDS for more details)

** Sound power levels measured according to ISO 60704.

*** For assistance with dimensioning necessary ventilation needs, contact authorized ventilation technician.

**** With impregnation program 75SDgrC.

**The reassuring
feeling of dry
workwear any
time, in and out,
in no time**



Hot Cylinder Ironers

Line 6000



Line 6000	Basic			LF		
	IC64821	IC64825	IC64832	IC64821LF	IC64825LF	IC64832LF
integrated feeder	X	X	X	X	X	X
integrated length folding	X	X	X	●	●	●
integrated cross folding and stacker	X	X	X	X	X	X
Roll Diameter (mm-in)	479 - 19"	479 - 19"	479 - 19"	479 - 19"	479 - 19"	479 - 19"
Ironing Width (mm-in)	2120 - 83"	2540 - 100"	3170 - 125"	2120 - 83"	2540 - 100"	3170 - 125"
Width (mm-in)	2785 - 110"	3205 - 126"	3835 - 151"	2785 - 110"	3205 - 126"	3835 - 151"
Depth (mm-in)	1070 - 42"	1070 - 42"	1070 - 42"	1070 - 42"	1070 - 42"	1070 - 42"
Height (mm-in)	1270 - 50"	1270 - 50"	1270 - 50"	1270 - 50"	1270 - 50"	1270 - 50"
Elec / Steam / Gas	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Evaporation capacity (Elec / Gas / Steam) (kg/hour)	40/37/63	48/48/75	59/59/93	40/37/63	48/48/75	59/59/93
Ironing speed (m/mn)	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9
Ergonomics rating	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Feed Now *	○	○	○	○	○	○
Dubixium *	○	○	○	○	○	○
Vacuum table *	○	○	○	○	○	○
Antistatic bar *	○	○	○	○	○	○
Diamms *	○	○	○	○	○	○
Feed Alone *	○	○	○	○	○	○
CMIS card	to be orderered separatly	to be orderered separatly	to be orderered separatly	to be orderered separatly	to be orderered separatly	to be orderered separatly

* be careful, all options are not available together in the same PNC, or for all heating source; see decription page 23

● standard ○ optional ✓ available ✕ not available

Hot Cylinder Ironers

Line 6000



Line 6000	FLF			FFS		
	IC64821FLF	IC64825FLF	IC64832FLF	IC64819FFS	IC64825FFS	IC64832FFS
integrated feeder	●	●	●	●	●	●
integrated length folding	●	●	●	●	●	●
integrated cross folding and stacker	X	X	X	●	●	●
Roll Diameter (mm-in)	479 - 19"	479 - 19"	479 - 19"	479 - 19"	479 - 19"	479 - 19"
Ironing Width (mm-in)	2120 - 83"	2540 - 100"	3170 - 125"	1920 - 76"	2540 - 100"	3170 - 125"
Width (mm-in)	2785 - 110"	3205 - 126"	3835 - 151"	3555 - 140"	4185 - 165"	4815 - 190"
Depth (mm-in)	1280 - 50"	1280 - 50"	1280 - 50"	1820 - 72"	1820 - 72"	1820 - 72"
Height (mm-in)	1460 - 57"	1460 - 57"	1460 - 57"	1590 - 63"	1590 - 63"	1590 - 63"
Elec / Steam / Gas	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Evaporation capacity (Elec / Gas / Steam) (kg/hour)	40/37/63	48/48/75	59/59/93	40/37/63	48/48/75	59/59/93
Ironing speed (m/mn)	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9
Ergonomics rating	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Feed Now *	X	X	X	X	X	X
Dubixium *	●	●	●	●	●	●
Vacuum table *	●	●	●	●	●	●
Antistatic bar *	●	●	●	●	●	●
Diamms *	●	●	●	●	●	●
Feed Alone *	X	X	X	X	X	X
CMIS card	to be orderered separatly	to be orderered separatly	to be orderered separatly	X	X	X

* be careful, all options are not available together in the same PNC, or for all heating source; see decription page 23

● standard ○ optional ✓ available X not available

Hot Cylinder Ironers

Line 6000



Line 6000	R			RLF		
	IC64821R	IC64825R	IC64832R	IC64821RLF	IC64825RLF	IC64832RLF
integrated feeder	X	X	X	●	●	●
integrated length folding	X	X	X	X	X	X
integrated cross folding and stacker	X	X	X	X	X	X
Roll Diameter (mm-in)	479 - 19"	479 - 19"	479 - 19"	479 - 19"	479 - 19"	479 - 19"
Ironing Width (mm-in)	2120 - 83"	2540 - 100"	3170 - 125"	2120 - 83"	2540 - 100"	3170 - 125"
Width (mm-in)	2785 - 110"	3205 - 126"	3835 - 151"	2785 - 110"	3205 - 126"	3835 - 151"
Depth (mm-in)	2540 - 100"	2540 - 100"	2540 - 100"	2656 - 105"	2656 - 105"	2656 - 105"
Height (mm-in)	1270 - 50"	1270 - 50"	1270 - 50"	1270 - 50"	1270 - 50"	1270 - 50"
Elec / Steam / Gas	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Evaporation capacity (Elec / Gas / Steam) (kg/hour)	40/37/63	48/48/75	59/59/93	40/37/63	48/48/75	59/59/93
Ironing speed (m/mn)	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9	1,5 - 9
Ergonomics rating	★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Feed Now *	○	○	○	○	○	○
Dubixium *	○	○	○	○	○	○
Vacuum table *	○	○	○	○	○	○
Antistatic bar *	○	○	○	●	●	●
Diamms *	○	○	○	○	○	○
Feed Alone *	○	○	○	○	○	○
CMIS card	to be orderered separatly	to be orderered separatly	to be orderered separatly	to be orderered separatly	to be orderered separatly	to be orderered separatly

* be careful, all options are not available together in the same PNC, or for all heating source; see decription page 23

● standard ○ optional ✓ available ✗ not available



Choose between **Superior**, **Performance** and **Active** packages.

Electric and Gas versions

						
Platform	Basic	LF	FLF	FFS	R	RLF
Ratio Large / Small Item	30% / 70%	50% / 50%	70% / 30%	90% / 10%	30% / 70%	50% / 50%
 SUPERIOR package	- Dubixium - Feed Alone (with Vacuum Table)	- Dubixium - Diamms - Feed Alone (with Vacuum Table) - Antistatic Bar	- Dubixium - Vacuum Table - Diamms - Antistatic Bar	- Dubixium - Vacuum Table - Diamms - Antistatic Bar	- Dubixium - Feed Alone (with Vacuum Table)	- Dubixium - Diamms - Feed Alone (with Vacuum Table) - Antistatic Bar
 PERFORMANCE package	- Dubixium - Vacuum Table	- Dubixium - Vacuum Table - Diamms			- Dubixium - Vacuum Table	- Dubixium - Vacuum Table - Diamms - Antistatic Bar
 ACTIVE package	- Feed Now	- Feed Now			- Feed Now	- Feed Now - Antistatic Bar

Steam versions

						
Platform	Basic	LF	FLF	FFS	R	RLF
Ratio Large / Small Item	30% / 70%	50% / 50%	70% / 30%	90% / 10%	30% / 70%	50% / 50%
 SUPERIOR package	- Feed Alone (with Vacuum Table)	- Diamms - Feed Alone (with Vacuum Table) - Antistatic Bar	- Vacuum Table - Diamms - Antistatic Bar	- Vacuum Table - Diamms - Antistatic Bar	- Feed Alone (with Vacuum Table)	- Diamms - Feed Alone (with Vacuum Table) - Antistatic Bar
 PERFORMANCE package	- Vacuum Table	- Vacuum Table - Diamms			- Vacuum Table	- Vacuum Table - Diamms - Antistatic Bar
 ACTIVE package						- Antistatic Bar

Ironers

Line 5000

Line 5000 Hot Cylinder Ironers



	IC43316	IC43320
Roll diameter (mm/in)	325 / 13	325 / 13
Ironing width (mm/in)	1650 / 65	2065 / 81
Width (mm-in)	2030 - 79 15/16"	2445 - 96 1/4"
Depth (mm-in)	690 - 27 3/16"	690 - 27 3/16"
Height (mm-in)	1145 - 45 1/16"	1145 - 45 1/16"
Electric / Steam / Gas	✓ / X / ✓	✓ / X / ✓
Evaporation capacity (l/h)	19.5	24.5
Speed (m/minute)	0.5 to 5.5	0.5 to 5.5
Ironer Moisture	o	o
Dubixium™*	X	X
Automatic feeding	X	X
Automatic folding	X	X

* For electric and gas heated versions

Line 5000 Warm Cylinder Ironers



	IB42310	IB42314	IB42316
Roll diameter (mm/in)	230 / 9	230 / 9	230 / 9
Ironing width (mm/in)	1000 / 39	1400 / 55	1650 / 64
Width (mm-in)	1395 - 54 15/16"	1795 - 70 11/16"	2045 - 80 1/2"
Depth (mm-in)	510 - 20 1/16"	510 - 20 1/16"	510 - 20 1/16"
Height (mm-in)	1025 - 40 3/8"	1025 - 40 3/8"	1025 - 40 3/8"
Electric	✓	✓	✓
Evaporation capacity (l/h)	5	6.8	8.1
Speed (m/minute)	3.4	3.4	3.4

Line 5000 Chest Ironers



	IB5 700
Roll diameter (mm/in)	700 / 27
Number of rolls	1 (steam or gas)
Ironing speed	From 3 to 12 m/mn Optional up to 16 m/mn
Ironing width (mm/in)	2500/3000/3300 steam or gas or electrical
Width (mm/in)	3750/4250/4550
Depth	2036
Height	1453
Electrical/Steam/gas/ thermal oil	✓/✓/✓/✗
Evaporation capacity (l/h)	125

● standard ○ optional
✓ available ✗ not available

Select the interface that caters best to your business – Basic or Advanced



Basic version

- ▶ Start & Stop buttons for:
 - engine and belt rotation
 - speed control
 - temperature control
 - heat system
- ▶ Plug & Play



Advanced version

- ▶ PLC with touch screen
- ▶ Modulating burner to optimize gas consumption
- ▶ PLC required when you have an integrated feeder
- ▶ Large 7.5" intuitive touch screen for operative and maintenance support
- ▶ 50 different programs to choose from
- ▶ Precise temperature control to avoid heat loss
- ▶ Auto-speed to adjust the linen contact time with the chest to prevent over drying or burning. Also protects from under drying to stop bacteria proliferation in wet linen
- ▶ Thanks to the PLC the ironer automatically adapts its folding function according to the linen size

* Optional feature



Finishing equipment

This is a selection of the key finishing products. A wide range of options and accessories (trolleys, bases, condensing units, etc) is also available. Ask your local office!

Tables



FIT1 Folding Table with manual boiler (2 hours) + iron



FIT2B Vacuum Ironing Table with integrated automatic boiler



FIT1-WC Vacuum/Blowing Table (left ended) without boiler

Finisher



FSF3 Pressing Shirt Finisher



FFT-WC Jacket Multiform Finisher



FTT2 Trouser Topper

Spotting units



FSU7 Pre-Spotting Portable Table



FSU4 Pre-Spotting and Pre-Brushing Cabinet with vacuum

Boiler



FSB24C Boiler 24 kW with condensate collecting tank

Finishing equipment

This is a selection of the key finishing products. A wide range of options and accessories (trolleys, bases, condensing units, etc) is also available. Ask your local office!

Presses



FPA6-WC Collar and Cuff Press



FPA1-WC Automatic Laundry Press with universal shape



FPA3-WC Automatic Laundry Mushroom Press



FPA1-D Automatic Cleaning Press with universal shape

Finishing Cabinet



FC48 Finishing Cabinet 8 hangers

Marking Machine



Y150 Marking Machine

Our service network for your satisfaction

No matter where your business is located. **Electrolux Professional stands ready**, everywhere, along with its reliable technicians, its networked service and its tailored solutions. For a lifetime partnership that suits you. Because with Electrolux Professional, **you never work alone**. We are committed to supporting you with a unique service network that makes **your work-life easier**.

- ▶ **149 Countries served**
A widespread service network applying the same, client-related approach. Operating in 149 countries all over the world, with Electrolux Professional as a unique contact point
- ▶ **2.200 Authorized service partners**
The most extensive, structured service network in the world to keep your appliances performing, supporting you in any circumstance.
- ▶ **10.000 Service engineers**
Our trustworthy ambassadors, 10.000 service engineers, taking care of your equipment and providing you with the assistance you need.

Automatic dosing of detergents is your best ally when it comes to real savings

When you choose a **ClarusVibe** model, the Intelligent Dosing feature comes as a standard, **automatically delivering the right amount of detergents according to the weight of the linen** inside the drum. It operates in perfect combination with either of our dosing pump options, JETSAVE or DOSAVE.

JETSAVE

The best choice



The **JETSAVE options** use venturi-based, water-powered pumps that require less maintenance because there are no moving parts or squeeze tubes to replace. Dosage is reliable and installation is sleek and tidy thanks to the built-in flush manifold.

DOSAVE




DOSAVE is a peristaltic based technology, designed for easy installation, easy programming and maximum savings. It requires more maintenance compared to JETSAVE.

ED (Efficient Dosing)



For all **CompassPro** models, the Efficient Dosing will be your accountable partner, making sure that **only the right amount of detergents will be used at each cycle, providing remarkable savings.**

When considering the cost of an investment, the up-front expense is just the tip of the iceberg.



15% Up-front investment

85% Life cycle costs

These costs make up **the bulk of your expenses** during the lifetime of your washer or dryer.



► Chemicals



► Energy



► Water



Line 6000 Detergents Range

Eco-range laundry detergents



L00 - Laundry Eco Degreaser

Code 0W7Y6G
PNC 432731829
(20 lt tank)



L01 - Laundry Eco Powder

Code 0W7RBB
PNC 432131139
(15 kg bag)



L02 - Laundry Eco Wash

Code 0W7RBC
PNC 432731140
(20 lt tank)



L03 - Laundry Eco Booster

Code 0W7RBF
PNC 432731143
(20 lt tank)



L04 - Laundry Eco Bleach

Code 0W7RBD
PNC 432731141
(20 lt tank)



L05 - Laundry Eco Softener

Code 0W7RBE
PNC 432731142
(20 lt tank)



L06 - Laundry Swan Wash

Code 0W7RBB
PNC 432131139
(15 kg bag)



L07 - Laundry Swan Gentle Wash

Code 0W7RBH
PNC 432731145
(20 lt tank)



L08 - Laundry Swan Bleach

Code 0W7RBI
PNC 432731146
(20 lt tank)



L09 - Laundry Swan Softener

Code 0W7RBJ
PNC 432731147
(20 lt tank)



Nordic Swan Certified

Pre-spotting agents



A01 - lagoon® Pre-treatment

Code 0W709B
PNC 432731091
(1 pack of two 5 lt tanks)



A02 - lagoon® Colour Transfer Reducer

Code 0W709K
PNC 432731099
(1 pack of two 5 lt tanks)



A03 - lagoon® Leather Care

Code 0W7Q1A
PNC 432731148
(1 pack of one 10 lt tank)



P01 - lagoon® Protein Stain Remover

Code 0W709E
PNC 432731094
(1 pack of six 0.5 lt bottles)
Code 0W709I
PNC 432731098
(1 pack of two 5 lt tanks)



P02 - lagoon® Tannin Stain Remover

Code 0W709C
PNC 432731092
(1 pack of six 0.5 lt bottles)
Code 0W709G
PNC 432731096
(1 pack of two 5 lt tanks)



P03 - lagoon® Grease Remover

Code 0W709D
PNC 432731093
(1 pack of six 0.5 lt bottles)
Code 0W709H
PNC 432731097
(1 pack of two 5 lt tanks)



P04 - lagoon® Ink Remover

Code 0W709F
PNC 432731095
(1 pack of six 0.5 lt bottles)

lagoon® Advanced Care



W01 - lagoon® Sensitive Detergent

Code 0W7095
PNC 432731085
(20 lt tank)
Code 0W7096
PNC 432731086
(10 lt tank)



W02 - lagoon® Delicate Detergent

Code 0W7099
PNC 432731089
(20 lt tank)
Code 0W709A
PNC 432731090
(10 lt tank)



W03 - lagoon® Sensitive Conditioner

Code 0W7097
PNC 432731087
(20 lt tank)
Code 0W7098
PNC 432731088
(10 lt tank)



C25 Rinse & Descale Tab

Code 0S2394
(50 tabs buckets;
30 gr. each)

Dissolve 1 tab in 1 liter of water and rinse the tumble dryer. If necessary you can use the scouring pad (0W7PM8)



Excellence is central to everything we do. By anticipating our customers' needs, we strive for Excellence with our people, innovations, solutions and services. To be The OnE making our customers' work-life easier, more profitable – and truly sustainable every day.

Follow us on



www.electroluxprofessional.com

Excellence with the environment in mind

- ▶ All our factories are ISO 14001-certified
- ▶ All our solutions are designed for low consumption of water, energy, detergents and harmful emissions
- ▶ In recent years over 70% of our product features have been updated with the environmental needs of our customers in mind
- ▶ Our technology is RoHS and REACH compliant and over 95% recyclable
- ▶ Our products are 100% quality tested by experts

